

KANSAS DEPARTMENT OF TRANSPORTATION
SPECIAL PROVISION LIST

PAGE: 1
DATE: 10/11/18

STATE PROJECT NO: K063-066 KA 4608-01 STATE CONTRACT NO: 518112121

PREPARED DATE: WAGE AREA: 1

REVISED DATE:

PRIMARY DISTRICT: 1 PRIMARY COUNTY: NEMAHA

DESCRIPTION: MILLING AND HMA OVERLAY. K-63 FR US36 JCT N TO STATE LI IN NM CO. LENGTH IS 11.040 MI. TIED TO K071-066 KA 5057-01 AND K063-066 KA 5058-01.

NOTE: THE FOLLOWING LIST OF SPECIAL PROVISIONS ARE FOR THIS PROJECT. OMISSION OF ALL OR PART OF A SPECIAL PROVISION IN THE ATTACHED PROPOSAL (CONTRACT) DOES NOT RELIEVE THE CONTRACTOR OF THE RESPONSIBILITY FOR OBTAINING THE COMPLETE PROVISION AS LISTED.

PROVISION NO.	DESCRIPTION
08-31-09-R01	REQUIRED CONTRACT PROVISION-EMULSIFIED ASPHALT ADJUSTMENT
08-10-66-R05	REQUIRED CONTRACT PROVISION-NONCOLLUSION / HISTORY-DEBARMENT
04-30-82-R07	REQUIRED CONTRACT PROVISION-FINANCIAL PREQUALIFICATION
08-04-92-R03	REQUIRED CONTRACT PROVISION-CONTRACTUAL SERVICES-LEGISLATOR
04-26-90-R05	REQUIRED CONTRACT PROVISION-LIMITS OF FED FUNDS FOR LOBBYING
10-10-00-R08	REQUIRED CONTRACT PROVISION-PRICE ADJUSTMENT FOR FUEL
06-01-06-R01	REQUIRED CONTRACT PROVISION-PRICE ADJUSTMENT FOR ASPHALT
07-19-80-R13	REQUIRED CONTRACT PROVISION-DBE CONTRACT GOAL
11-03-80-R09	REQUIRED CONTRACT PROVISION-NOTICE FOR AFFIRMATIVE ACTION
11-15-96-R05	REQUIRED CONTRACT PROVISION-EEO REQUIREMENT
07-01-17-R1	REQUIRED CONTRACT PROVISION - BOYCOTT OF ISRAEL PROHIBITED
09-06-94-R01	NOTICE TO CONTRACTORS (USDOT HOTLINE)
01-01-11-R01	REQUIRED CONTRACT PROVISION-TAX CLEARANCE CERTIFICATE
KS180019	MINIMUM WAGE RATE (AREA 1)
FHWA-1273	REQUIRED CONTRACT PROVISION-FEDERAL-AID CONSTRUCTION CONTRACTS
07-18-80-R29	REQUIRED CONTRACT PROVISION-UTILIZATION OF DBE'S
15-ER-1-R14	ERRATA SHEET FOR STD SPEC BOOK FOR RD & BR CONST, 2015 ED
03-01-18	POLICY AGAINST SEXUAL HARASSMENT
15-01006-R01	WORKING DAYS AND LIQUIDATED DAMAGES
15-01008-R01	FUEL ADJUSTMENT
15-01009	ASPHALT ADJUSTMENT
15-01010	EMULSIFIED ASPHALT ADJUSTMENT
15-01011-R06	ENVIRONMENTAL CONCERNS - MIGRATORY BIRD TREATY ACT
15-01012-R01	SEASONAL LIMITATIONS
15-01016-R02	PROSECUTION AND PROGRESS
15-01017	CARGO PREFERENCE ACT
15-01018	CONTROL OF MATERIALS
15-01019	CONTROL OF WORK
15-01021-R01	BIDDING REQUIREMENTS AND CONDITIONS
15-01022	SCOPE OF WORK
15-06003-R02	HMA BOND STRENGTH
15-06006-R01	ASPHALT PAVEMENT SMOOTHNESS
15-06007-R01	HOT MIX ASPHALT CONSTRUCTION QC/QA
15-08001-R03	WORK ZONE TRAFFIC CONTROL AND SAFETY (FOR 1R'S)
15-11002-R01	AGGREGATE FOR HMA

KANSAS DEPARTMENT OF TRANSPORTATION
SPECIAL PROVISION LIST

PAGE: 2
DATE: 10/11/18

STATE PROJECT NO: K063-066 KA 4608-01

STATE CONTRACT NO: 518112121

PREPARED DATE:

WAGE AREA: 1

REVISED DATE:

PRIMARY DISTRICT: 1

PRIMARY COUNTY: NEMAHA

DESCRIPTION: MILLING AND HMA OVERLAY. K-63 FR US36 JCT N TO STATE LI IN NM CO. LENGTH IS 11.040 MI. TIED TO K071-066 KA 5057-01 AND K063-066 KA 5058-01.

NOTE: THE FOLLOWING LIST OF SPECIAL PROVISIONS ARE FOR THIS PROJECT. OMISSION OF ALL OR PART OF A SPECIAL PROVISION IN THE ATTACHED PROPOSAL (CONTRACT) DOES NOT RELIEVE THE CONTRACTOR OF THE RESPONSIBILITY FOR OBTAINING THE COMPLETE PROVISION AS LISTED.

PROVISION NO. DESCRIPTION

15-12001	GENERAL REQUIREMENT DIVISION 1200
15-17004-R01	RELEASE COMPOUND FOR ASPHALT MIXES
15-22005-R01	IMAGE SYSTEMS
15-22006	RETROREFLECTIVE SHEETING
15-25001-R06	PART V
15-25002	CONSTRUCTION MANUAL - PART V
15-26001-R06	MATERIALS CERTIFICATIONS
15-MR0194	MODIFIED REQUIREMENTS - ASPHALT MIXTURES
15-PS0018	COMBINATION, TIED BIDS ON 1R PROJECTS WITH FEDERAL-AID FUNDS

END OF SPECIAL PROVISION LIST



General Notes

9/17/2018

Page 1 of 1

Project No. 63- 66 KA 4608-01

Note


- 1 All milled areas will be covered with HMA within 24 hours.

- 2 Temporary pavement markings will be required on all milled surfaces not covered with HMA the same day and be subsidiary to the contract.

- 3 KDOT will retain 10,000 tons of millings. The remaining millings will become property of the contractor. KDOT millings should be hauled to the KDOT strip located 1.5 miles north of Seneca on K-63.

- 4 For RAP sample information and location, contact Chris Rottinghaus at 785-486-2142.

TYPICAL SECTION

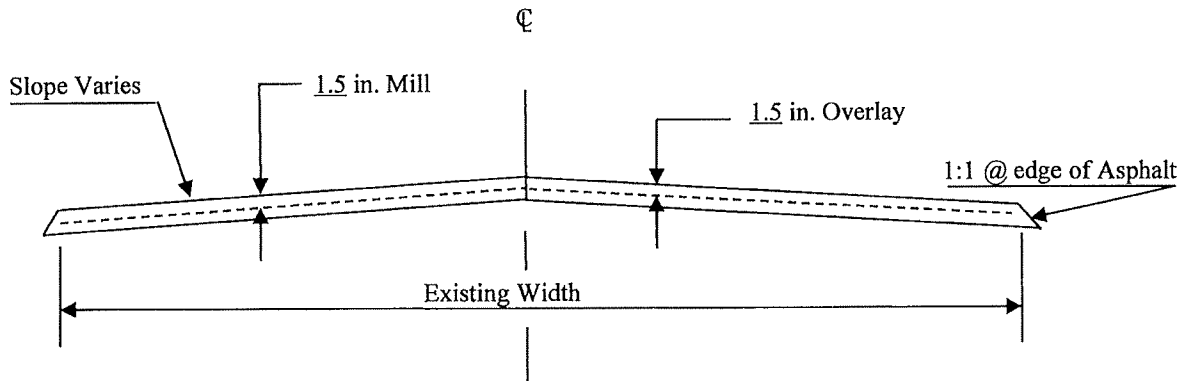

not to scale

- Typical Slope 1.56 % on Tangents and on super-elevated sections to match existing super or as directed by the Engineer.
- To allow for a reasonable transition the overlay is to be tapered approximately three feet at all paved side roads and entrances (except those that are approved to be fully paved).

ROADWAY WIDTHS

Location	mile	Approx. Width	Location	mile	Approx. Width
Milling	11.04	24'	Overlay	11.04	24'
Widenings		tons	Widenings		tons
US-36 Jct		22	US-36 Jct		22
Wildcat Creek		44	Wildcat Creek		44

RATE OF APPLICATION

Quantity based on SR- 12.5A @ 0.0816 T/yd²
 PG 64 - 22
 SS-1HP or approved alternate shall be used as Tack.
 Millings Computed @ 145 lb/ft³

	Date: 6/5/2018 10:53 AM	KANSAS DEPARTMENT OF TRANSPORTATION
NemahaCo.	PROJ. NO.63-66 KA 4608-01	TITLE: MILLOL

**SUMMARY OF TRAFFIC CONTROL DEVICES
(FOR INFORMATION ONLY)**

All traffic control devices shall be placed in accordance with the applicable KDOT Traffic Control Standards. The contractor shall provide all signs and other traffic control devices for proper traffic control of all construction activities. Quantities listed are estimates only. Contractor operations may require additional signs and traffic control devices, this will be subsidiary to the bid item traffic control.

WORK ZONE SIGNS *			
SIGN NO.	SIZE - SQ. FT.		
	0-9.25	9.26-16.25	16.26 & OVER
R2-1			
R4-1	2		
W3-4		2	
W3-5			
W8-11		2	
W14-3	2		
W20-1		4	
W20-4		2	
W20-5			
W20-7		3	
W21-5			
KG20-5	6		
W8-7		1	
G20-4			
W8-15		2	
W8-15P	2		
KM4-20			
KG20-2	4		
KI-104a		2	
KI-105a		2	

LIGHTED DEVICES *	
WORK ZONE WARNING LIGHT (TYPE "A" LOW INTENSITY)	
WORK ZONE WARNING LIGHT (RED TYPE "B" HIGH INTENSITY)	
ARROW DISPLAY	
PORTABLE CHANGEABLE MESSAGE SIGN	

BARRICADES *		CHANNELIZING DEVICES *		
TYPE III (4' TO 12')	PEDESTRIAN	FIXED	PORTABLE	PEDESTRIAN
			50	

**SUMMARY OF TRAFFIC CONTROL DEVICES
(EACH)**

WORK ZONE SIGN (SPECIAL)		
SIGN NO.	16.25 SQ. FT. & LESS	16.26 SQ. FT. & OVER

RECAPITULATION OF QUANTITIES		
ITEM	QUANTITY	UNIT
WORK ZONE SIGNS (0 TO 9.25 SQ. FT.)		EADA
WORK ZONE SIGNS (9.26 TO 16.25 SQ. FT.)		EADA
WORK ZONE SIGNS (16.26 SQ. FT. & OVER)		EADA
WORK ZONE BARRICADES (TYPE 3 - 4' TO 12')		EADA
WORK ZONE BARRICADES (PEDESTRIAN)		EADA
CHANNELIZER (FIXED)		EADA
CHANNELIZER (PORTABLE)		EADA
CHANNELIZER (PEDESTRIAN)		EADA
WORK ZONE WARNING LIGHT (TYPE "A" LOW INTENSITY)		EADA
WORK ZONE WARNING LIGHT (RED TYPE "B" HIGH INTENSITY)		EADA
ARROW DISPLAY		EADA
PORTABLE CHANGEABLE MESSAGE SIGN		EADA
PAVEMENT MARKING (TEMPORARY)		
4" SOLID (TYPE I)		STA./LINE
4" SOLID (TYPE II)		STA./LINE
4" BROKEN (8')(TYPE I)		STA./LINE
4" BROKEN (8')(TYPE II)		STA./LINE
4" BROKEN (3')(TYPE I)		STA./LINE
4" BROKEN (3')(TYPE II)		STA./LINE
4" DOTTED EXTENSION (TYPE I)		STA./LINE
4" DOTTED EXTENSION (TYPE II)		STA./LINE
SOLID (LINE MASKING TAPE)		STA./LINE
BROKEN (LINE MASKING TAPE)		STA./LINE
SYMBOL (TYPE I)		EACH
SYMBOL (TYPE II)		EACH
FLEXIBLE RAISED PAVEMENT MARKERS (4" BROKEN (8'))		STA./LINE
FLEXIBLE RAISED PAVEMENT MARKERS (4" BROKEN (3'))	578.2	STA./LINE
PAVEMENT MARKING REMOVAL		LIN. FT.
CONCRETE SAFETY BARRIER (TYPE F3) (TEMPORARY)		LIN. FT.
CONCRETE SAFETY BARRIER (TYPE F3) (TEMP.-INSTALL ONLY)		LIN. FT.
CONCRETE SAFETY BARRIER (TYPE F3) (TEMP.-RELOCATE)		LIN. FT.
INERTIAL BARRIER SYSTEM		EACH
REPLACEMENT MODULES (IBS)		EACH
WORK ZONE SIGN (SPECIAL) (16.25 SQ. FT. & LESS)		EACH
WORK ZONE SIGN (SPECIAL) (16.26 SQ. FT. & OVER)		EACH
RIGID RAISED PAVEMENT MARKER (TYPE I)		EACH
RIGID RAISED PAVEMENT MARKER (TYPE II)		EACH
TRAFFIC SIGNAL INSTALLATION (TEMPORARY)		LUMP SUM
TRAFFIC CONTROL (INITIAL SET UP)		LUMP SUM
TRAFFIC CONTROL	LUMPSUM	LUMP SUM
FLAGGER (SET PRICE)	1	HOUR

NOTES:
Refer to standard drawing TE 700, 702, 710, 730.

3				
2				
1	11/10/18	Removed Replacement Modules Summary Table, Added (IBS) to Replacement Modules description	JGB	
NO.	DATE	REVISIONS	BY	APP'D
KANSAS DEPARTMENT OF TRANSPORTATION				
TRAFFIC CONTROL SUMMARY OF DEVICES RECAPITULATION OF QUANTITIES				
TE705				
FHWA APPROVAL	08/01/15	APP'D	Kristina Erickson	
DESIGNED	B.A.H.	DETAILED	R.W.B.	QUANTITIES
DESIGN CK.		DETAIL CK.		QUAN. CK.
				TRACED
				TRACE CK.