

KANSAS DEPARTMENT OF TRANSPORTATION  
SPECIAL PROVISION LIST

PAGE: 1  
DATE: 12/11/18

STATE PROJECT NO: K016-106 KA 5173-01

STATE CONTRACT NO: 519016191

PREPARED DATE:

WAGE AREA: 2

REVISED DATE:

PRIMARY DISTRICT: 1

PRIMARY COUNTY: STATEWIDE

DESCRIPTION: CHIP SEAL. KA 5173-01, K16, FR US59 JCT TO 400FT W US24 JCT. KA 5171-01 FR US59 TO LV/JF CO LI IN JF CO, 8.046 MI. KA 5172-01 FR LV/JF CO LI TO 400FT W OF US 24 IN LV CO, 7.990 MI. LENGTH IS 16.036 MI

NOTE: THE FOLLOWING LIST OF SPECIAL PROVISIONS ARE FOR THIS PROJECT. OMISSION OF ALL OR PART OF A SPECIAL PROVISION IN THE ATTACHED PROPOSAL (CONTRACT) DOES NOT RELIEVE THE CONTRACTOR OF THE RESPONSIBILITY FOR OBTAINING THE COMPLETE PROVISION AS LISTED.

PROVISION NO. DESCRIPTION

---

08-10-66-R05	REQUIRED CONTRACT PROVISION-NONCOLLUSION / HISTORY-DEBARMENT
04-30-82-R07	REQUIRED CONTRACT PROVISION-FINANCIAL PREQUALIFICATION
08-04-92-R03	REQUIRED CONTRACT PROVISION-CONTRACTUAL SERVICES-LEGISLATOR
06-01-06-R01	REQUIRED CONTRACT PROVISION-PRICE ADJUSTMENT FOR ASPHALT
11-15-96-R05	REQUIRED CONTRACT PROVISION-EEO REQUIREMENT
02-01-95-R02	REQUIRED CONTRACT PROVISION-AREA PRACTICE DG-JO-LV-MI-SN-WY
07-01-17-R1	REQUIRED CONTRACT PROVISION - BOYCOTT OF ISRAEL PROHIBITED
01-01-11-R01	REQUIRED CONTRACT PROVISION-TAX CLEARANCE CERTIFICATE
KS190004	MINIMUM WAGE RATE (AREA 4)
KS190020	MINIMUM WAGE RATE (AREA 2)
15-ER-1-R15	ERRATA SHEET FOR STD SPEC BOOK FOR RD & BR CONST, 2015 ED
03-01-18	POLICY AGAINST SEXUAL HARASSMENT
15-01003	REQUIRED CONTRACT PROVISIONS KS FUNDED CONST CONTRACTS
15-01009	ASPHALT ADJUSTMENT
15-01011-R06	ENVIRONMENTAL CONCERNS - MIGRATORY BIRD TREATY ACT
15-01012-R01	SEASONAL LIMITATIONS
15-01016-R02	PROSECUTION AND PROGRESS
15-01019	CONTROL OF WORK
15-01021-R01	BIDDING REQUIREMENTS AND CONDITIONS
15-01022	SCOPE OF WORK
15-08001-R03	WORK ZONE TRAFFIC CONTROL AND SAFETY (FOR 1R'S)
15-12001	GENERAL REQUIREMENT DIVISION 1200
15-22005-R01	IMAGE SYSTEMS
15-22006	RETROREFLECTIVE SHEETING
15-25001-R06	PART V
15-25002	CONSTRUCTION MANUAL - PART V
15-26001-R07	MATERIALS CERTIFICATIONS
15-PS0018	COMBINATION, TIED BIDS ON 1R PROJECTS WITH FEDERAL-AID FUNDS

END OF SPECIAL PROVISION LIST

---






---

Project No. **K16-106 KA 5173-01**

1. This job consists of a chip seal and asphalt patching on asphalt pavement. The job is located on K-16 highway 400' west of the US-24 junction to the 74<sup>th</sup> St intersection in Leavenworth County and from the 74<sup>th</sup> St intersection to the US-59 junction in Jefferson County.
2. Pilot car operations shall be required in all one lane traffic situations; mobile operations will not be permitted. The pilot car must be able to make a round trip of the lane closure within 15 minutes.
3. One day advanced notice will be required for lane closures.
4. The contractor shall place Portable Changeable Message Boards on the project advising the traveling public of work activities. These Portable Changeable Message Boards shall be active 5 working days before work begins. The notice to proceed will be issued the day the PCMS are placed and working days will begin being charged but no work will be allowed.
5. When the contractor is not working all lanes must be open to traffic.
6. The contractor shall conduct his operations in a systematic manner to limit the disruption of traffic. The size of work zones shall be proportional to the contractor's work force and equipment capabilities.
7. The chip seal shall be placed the full width of the roadway including all widenings.
8. HMA-Commercial Grade Patching shall be completed prior to the chip seal operation. Patch locations and size shall be determined by the engineer. Patch width will be between 6 feet and 14 feet. A 6-foot mill may be used to remove material for patching.
9. Flexible Raised Pavement Markers shall be used along centerline and to delineate turn lanes or other areas as directed by the engineer.
10. Permanent pavement marking will be placed by KDOT maintenance forces.

TYPICAL SECTION

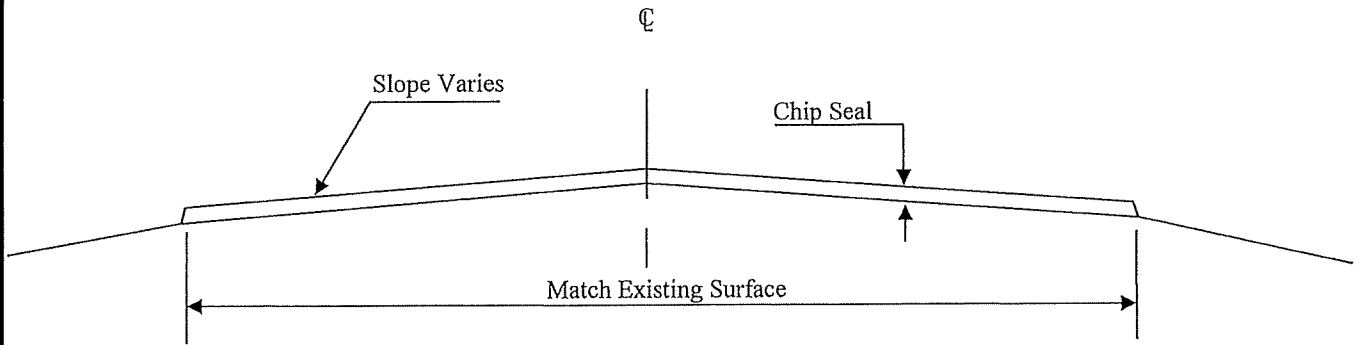

not to scale

ROADWAY WIDTHS

Location	mile	Approx. Width	Location	mile	Approx. Width
74 <sup>th</sup> St Intersection	0	26			
	1	26			
	2	26			
	3	26			
	4	26			
	5	26			
	6	26			
	7	26			
928' East of US 59 Junction	7.8	26			
	41555'				
928' East of US 59 Junction	7.8	36			
US 59 Junction	8.0	36			
	928'				
Right turn lane @ US 59	373'	18			

RATE OF APPLICATION

Cover Material CM-L-2 @ 0.0082 yd<sup>3</sup>/yd<sup>2</sup>

Emulsified Asphalt (CRS-1HP) @ 0.42 gal/yd<sup>2</sup>

	Date: 9/7/2018 11:56 PM	KANSAS DEPARTMENT OF TRANSPORTATION
Jefferson Co.	PROJ. NO. <u>K16- 44 KA 5171-01</u>	TITLE: CHIPSEALHIADT



**SUMMARY OF TRAFFIC CONTROL DEVICES  
(FOR INFORMATION ONLY)**

All traffic control devices shall be placed in accordance with the applicable KDOT Traffic Control Standards. The contractor shall provide all signs and other traffic control devices for proper traffic control of all construction activities. Quantities listed are estimates only. Contractor operations may require additional signs and traffic control devices, this will be subsidiary to the bid item traffic control.

WORK ZONE SIGNS *			
SIGN NO.	SIZE - SQ. FT.		
	0-9.25	9.26-16.25	16.26 & OVER
R2-1	4		
R4-1	2		
W3-4		2	
W3-5			
W8-11			
W14-3	2		
W20-1		5	
W20-4		2	
W20-5			
W20-7		2	
W21-5			
G20-4			
KG20-5	3		
KM4-20			
KG20-2	5		
KI-104a		2	
KI-105a		2	

LIGHTED DEVICES *	
WORK ZONE WARNING LIGHT (TYPE "A" LOW INTENSITY)	
WORK ZONE WARNING LIGHT (RED TYPE "B" HIGH INTENSITY)	
ARROW DISPLAY	
PORTABLE CHANGEABLE MESSAGE SIGN	

BARRICADES *		CHANNELIZING DEVICES *		
TYPE III (4' TO 12')	PEDESTRIAN	FIXED	PORTABLE	PEDESTRIAN
			130	

**SUMMARY OF TRAFFIC CONTROL DEVICES  
(EACH)**

WORK ZONE SIGN (SPECIAL)		
SIGN NO.	16.25 SQ. FT. & LESS	16.26 SQ. FT. & OVER

**RECAPITULATION OF QUANTITIES**

ITEM	QUANTITY	UNIT
WORK ZONE SIGNS (0 TO 9.25 SQ. FT.)		EADA
WORK ZONE SIGNS (9.26 TO 16.25 SQ. FT.)		EADA
WORK ZONE SIGNS (16.26 SQ. FT. & OVER)		EADA
WORK ZONE BARRICADES (TYPE 3 - 4' TO 12')		EADA
WORK ZONE BARRICADES (PEDESTRIAN)		EADA
CHANNELIZER (FIXED)		EADA
CHANNELIZER (PORTABLE)		EADA
CHANNELIZER (PEDESTRIAN)		EADA
WORK ZONE WARNING LIGHT (TYPE "A" LOW INTENSITY)		EADA
WORK ZONE WARNING LIGHT (RED TYPE "B" HIGH INTENSITY)		EADA
ARROW DISPLAY		EADA
PORTABLE CHANGEABLE MESSAGE SIGN		EADA
PAVEMENT MARKING (TEMPORARY)		
4" SOLID (TYPE I)		STA./LINE
4" SOLID (TYPE II)		STA./LINE
4" BROKEN (8")(TYPE I)		STA./LINE
4" BROKEN (8")(TYPE II)		STA./LINE
4" BROKEN (3")(TYPE I)		STA./LINE
4" BROKEN (3")(TYPE II)		STA./LINE
4" DOTTED EXTENSION (TYPE I)		STA./LINE
4" DOTTED EXTENSION (TYPE II)		STA./LINE
SOLID (LINE MASKING TAPE)		STA./LINE
BROKEN (LINE MASKING TAPE)		STA./LINE
SYMBOL (TYPE I)		EACH
SYMBOL (TYPE II)		EACH
FLEXIBLE RAISED PAVEMENT MARKERS (4" BROKEN (8"))		STA./LINE
FLEXIBLE RAISED PAVEMENT MARKERS (4" BROKEN (3"))	846.8	STA./LINE
PAVEMENT MARKING REMOVAL		LIN. FT.
CONCRETE SAFETY BARRIER (TYPE F3) (TEMPORARY)		LIN. FT.
CONCRETE SAFETY BARRIER (TYPE F3) (TEMP.-INSTALL ONLY)		LIN. FT.
CONCRETE SAFETY BARRIER (TYPE F3) (TEMP.-RELOCATE)		LIN. FT.
INERTIAL BARRIER SYSTEM		EACH
REPLACEMENT MODULES (IBS)		EACH
WORK ZONE SIGN (SPECIAL) (16.25 SQ. FT. & LESS)		EACH
WORK ZONE SIGN (SPECIAL) (16.26 SQ. FT. & OVER)		EACH
RIGID RAISED PAVEMENT MARKER (TYPE I)		EACH
RIGID RAISED PAVEMENT MARKER (TYPE II)		EACH
TRAFFIC SIGNAL INSTALLATION (TEMPORARY)		LUMP SUM
TRAFFIC CONTROL (INITIAL SET UP)		LUMP SUM
TRAFFIC CONTROL	LUMPSUM	LUMP SUM
FLAGGER (SET PRICE)	1	HOUR

**NOTES:**

Subsidiary Temporary Markings  
16- 44 KA 5171-01  
FRPM - Approx 3.7 Sta/line, turn lane

3				
2				
1	11/10/16	Removed Replacement Modules Summary Table, Added "IBS" to Replacement Modules description	JGB	
NO.	DATE	REVISIONS	BY	APP'D
KANSAS DEPARTMENT OF TRANSPORTATION				
TRAFFIC CONTROL SUMMARY OF DEVICES RECAPITULATION OF QUANTITIES				
TEZ95				
FHWA APPROVAL	06/01/15	APP'D	Kristina Erickson	
DESIGNED	B.A.H.	DETAILED	R.W.B.	QUANTITIES
DESIGN CK.		DETAIL CK.		QUAN. CK.
				TRACED
				TRACE CK.

Co. | Proj. No. K16-106 KA 5173-01 | Title: